

SONAROL

MODERN THERM



Be open to new



MODERN THERM SONAROL



WARM



SILENT




TIGHT



SAFE

Reference window heat transfer coefficient	Uw = 0,81 W/m²K
Profiles	6-chambers
Mounting depth	80 mm frame 80 mm sash
Sealed glass unit	48 mm, Ug = 0,5 W/m²K
Gaskets	two gasket seals
Fittings	MACO from MULTI-MATIC series anti-wind latch anti-burglary hooks sash lifter with wrong handle position blocking

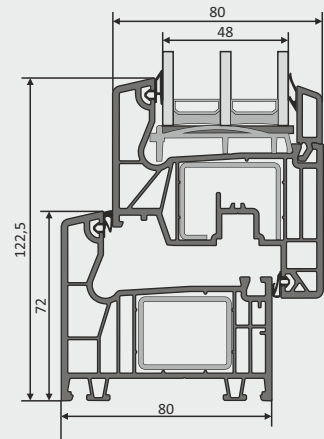

Adjust a window to your own needs



core color

- white, anthracite, carmel, brown



veneer colour

- over 30 patterns for use on one side or both sides of the window




handle type and shape

- various colors, shapes and types - standard, with key locking option or with locking button



cover colour

- cover colour adjusted to the colour of handles and/or veneer



glazing type and colour

- wide selection of glazing – frosted, anti-reflective, safe, sound-absorbing, ornamented



extras

- air inlet vents: manual, pressure-based, controlled by humidity sensor
- muntins: internal, Viennese, glued on,
- connectors, expansions

